

Vehicle image




Main Specifications

Model	PH65-18
format	Boom car
method	Vacuum squeeze type


<b>Model</b>		PH65-18	
<b>pump</b>	<b>Discharge rate</b>	65m <sup>3</sup> / h	55m <sup>3</sup> / h
	<b>Discharge pressure</b>	1.76Mpa (18kgf / cm <sup>2</sup> )	2.15Mpa (22kgf / cm <sup>2</sup> )
	<b>Cylinder diameter</b>	127mm	
	<b>stroke</b>	Over	
	<b>Hopper capacity</b>	0.3m <sup>3</sup>	
	<b>Discharge port diameter</b>	130mm	
	<b>The maximum aggregate size</b>	40mm	
	<b>Other</b>		
<b>boom</b>	<b>Model</b>	3-stage Z-shaped	
	<b>Maximum height above the ground</b>	17.6m	
	<b>From the pivot center tip length</b>	14.3m	
	<b>The diameter of the pipe</b>	100A	
	<b>Turning angle</b>	Full 360 ° turning	
<b>power</b>	<b>method</b>	diesel engine	
	<b>output</b>	143kw	
<b>Vehicles and aircraft size</b>	<b>Total height</b>	2950mm	
	<b>Full width</b>	2170mm	
	<b>full length</b>	7500mm	
	<b>Gross weight</b>	7970kg	
<b>Other</b>			

**External view**

---

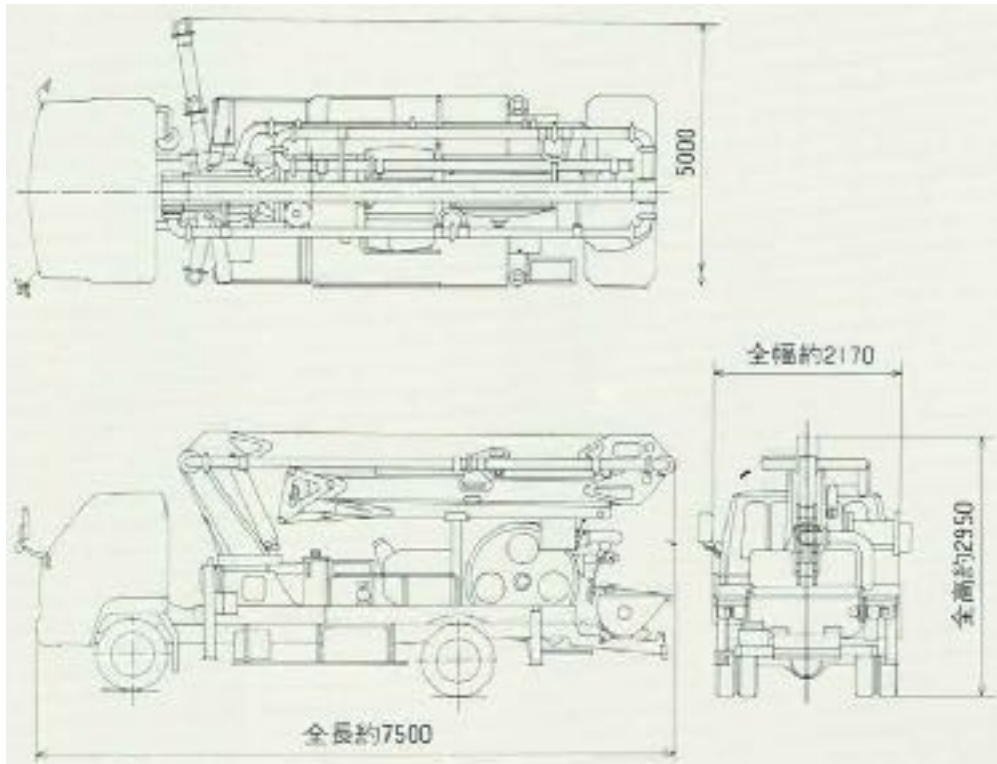

### Pumping performance

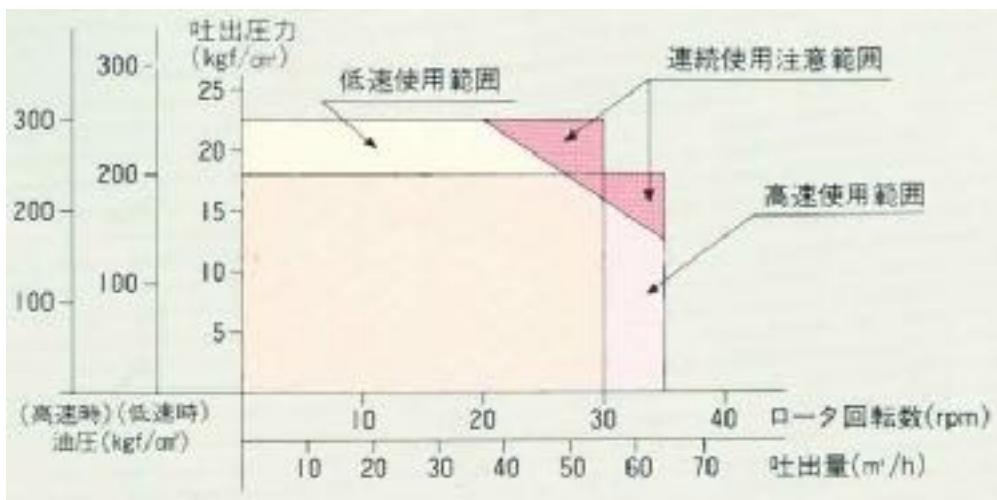

### Boom working range view

